




# PIG Grippy Adhesive-Backed Absorbent Mat

## MAT3200

41 cm x 61 cm, 10 pads per box, Absorbs up to 3.8 L per box

Our exclusive, adhesive-backed mat stays put to prevent slips, trips and falls around workstations and walkways near machinery in industrial workplaces.

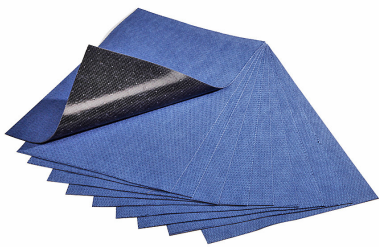

- Adhesive-backed absorbent mat stays exactly where you put it with no shifting, bunching up or flipping over to prevent slips, trips and falls in workstations and around machinery
- Proprietary adhesive sticks to the floor with a super-tight grip, but peels up easily for quick changeouts; reduces clean-up time to make your workplace more productive
- PIG Grippy Mat will stick to most common commercial floor surfaces, including: concrete, vinyl tile, ceramic tile, quarry tile and linoleum
- Tough, spunbond top layer with heavy-duty zigzag stitching stands up to foot and light-wheeled traffic as well as heavy equipment drive overs; keep mat in service until it's saturated or shows signs of wear
- Layers of fine-fibre polypropylene safely absorb leaks, drips and overspray of oils, coolants, solvents and water
- Traps oil, grease and grime to keep them from being tracked around; ideal for oily areas near machines and equipment
- 41cm x 61cm mat pads are great for lining workbenches, countertops and toolboxes
- Leakproof backing prevents absorbed liquid from soaking through to the floor
- Dark colour hides grime, so the mat looks cleaner for longer
- Easy to cut and install: roll it out, stick it down and smooth it out
- Tested and Certified by the National Floor Safety Institute (NFSI): when used as part of your floor safety programme, high-traction surfaces such as PIG Grippy Adhesive-Backed Absorbent Mat is proven to reduce slip-and-fall claims by as much as 90%



## Specifications

Absorbency Per Selling Unit	Up to 3.8 L per box
Certification	NSFI Certified, ANSI B101.1- 2009
Colour	Blue
Composition	Absorbent - Polypropylene; Stitching - Polyester; Adhesive Backing - Proprietary Adhesive Material
Fluids Absorbed	Oils, Coolants, Solvents & Water
Length	61 cm

Mat Weight	Mediumweight
Packaging	Box
Perforated	Not Perforated
Poly Backing	Poly-Backed
Recycled Material	25% or more Recycled Content
Storage Temperature	Store between 0°C(32°F) - 49°C(120°F)
Temperature Limit	Surface temperatures from 13°C - 49°C
UV Resistant	Not UV Resistant
Width	41 cm
Weight	1.4 kg
Sold as	10 Pads per Box

## Documentation

[STORAGE & SHELF LIFE OF PIG ABSORBENTS & ABSORBENT SPILL KITS](#)

[PIG GRIPPY ABSORBENT MAT - INSTALLATION GUIDE](#)

[PIG GRIPPY ADHESIVE-BACKED MAT NOTICE](#)

[CHEMICAL COMPATIBILITY GUIDE FOR PIG UNIVERSAL ABSORBENT MATS](#)

[TECHNICAL DATA SHEET PIG® ADHESIVE BACKED GRIPPY MAT](#)

## Certifications, Approvals and Ratings

NSFI Certified

ANSI B101.1- 2009

## Disclaimers

Only legally implied warranties apply. Check compatibility before use. Lifespan varies. See full Disclaimer below.

**New Pig Ltd.**  
Hogs Hill • Watt Place • Hamilton International Technology Park  
Blantyre • Glasgow • United Kingdom • G72 0AH

+44 (0)800 919 900

**New Pig B.V.**  
Concorde 5 • 5126 RM Gilze • The Netherlands

+31 (0)76 596 9250

(English)

+33 (0)800 90 30 22

(French)

+49 (0)800-1-827-487

(German)

+39 800 874 60

(Italian)

newpig.co.uk

pigpen@newpig.com

newpig.eu

pigpost@newpig.com



New Pig